

BMK wall clips are designed for mounting copper pipes to the wall and are made up of three parts, namely the one-piece clip, the sleeve, and a nut. The sleeve has three characteristics. The leading edge is flared to permit easy location. The trailing edge is domed and acts as a travel stop for the nut. Finally, its overall conical shape ensure secure fixture. Thanks to these technical features, BM clips are very easy to mount correctly.




### Korzyści

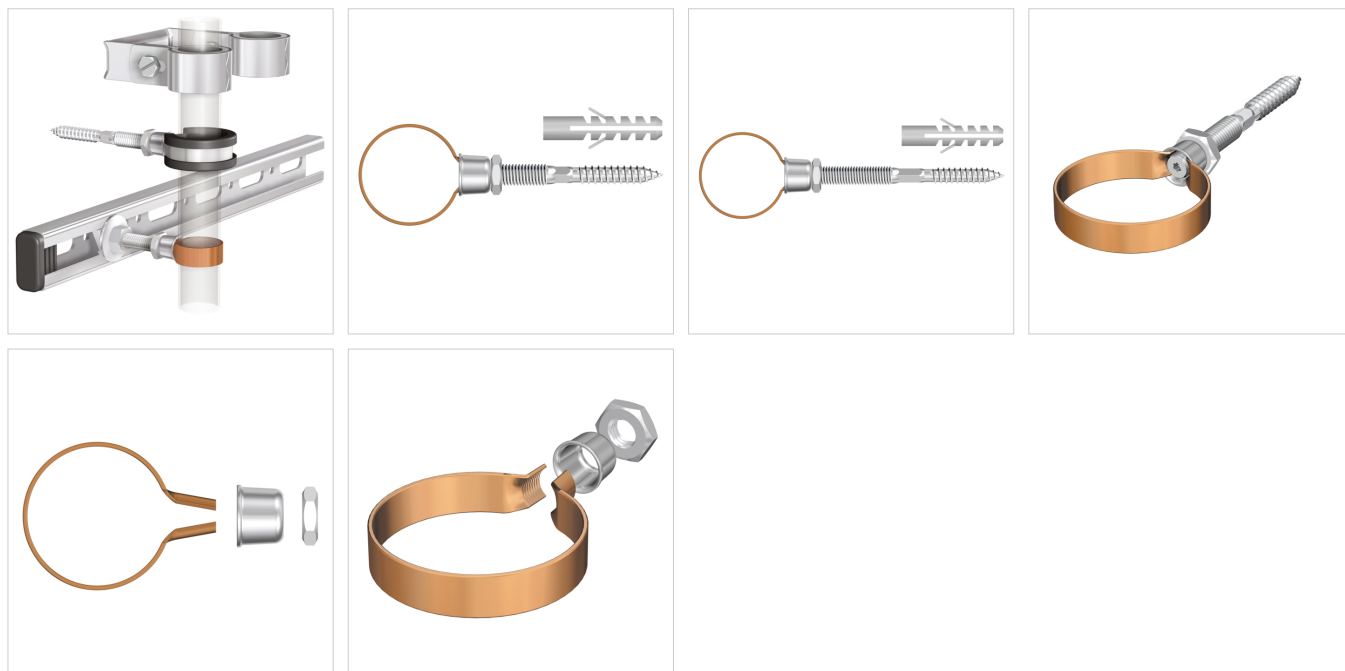
- One-piece clip with fixing materials.
- The fixing is covered by the clip so that it is not visible.
- Rigid fastening.
- Conical sleeve with locating edge for firm clamping.

### Dane techniczne

- Clip: copper.
- Sleeve, nut and wood screw: electrolytically zinc plated.
- BM wall clips are compatible with pipe sizes as per DIN EN 1057.
- Safety margin for minimum breaking load (V) = 3.
- Plug sizes:  
BMK 8: Ø 10 x 50  
BMK 10: Ø 12 x 60
- Dowel screws:  
BMK 8: HO 8 x 80  
BMK 10: HO 10 x 90

Typ	Ø Pipe ext. dia. [mm]	Connection	Max. working load [N]	Strip dimensions [mm]	Torx		Numer katalogowy
BMK-HK M 8 x 12 *	12	M 8	1000	10 x 1,2	6	10	10-38110
BMK-HK M 8 x 15 *	15	M 8	1000	10 x 1,2	6	10	10-38112
BMK-HK M 8 x 18	18	M 8	1000	10 x 1,2	6	10	10-38114
BMK-HK M 8 x 22 *	22	M 8	1000	10 x 1,2	6	10	10-38116
BMK-HK M 8 x 28 *	28	M 8	1000	10 x 1,2	6	10	10-38118
BMK-HK M 8 x 35 *	35	M 8	1000	10 x 1,2	6	10	10-38120

\* KIWA certified certificate BRL-K-627/02 for use with potable water.

**kiwa**

**Więcej informacji znajdziesz w Internecie:**

[cert\\_clips\\_kiwa.pdf](#)

[Thermal length change](#)

[Dimensions and weights of tubes](#)

Gronowska 8  
64-100, Leszno - pl

T +48 65 529 49 89  
E [pl.info@aalberts-hfc.com](mailto:pl.info@aalberts-hfc.com)  
I [flamcogroup.com/pl](http://flamcogroup.com/pl)